

PWR11 MODEL 30VDC 35A BATTERY CHARGER CATALOGUE



POWER
ELEKTRONİK®
Endüstriyel Güç Sistemleri
Industrial Power Solutions

POWER SOLAR **POWER**
ENGINEERING

Güç her zaman, her yerde

Power anytime, anywhere



220 Vdc

125 Vdc

110 Vdc

48 Vdc

30 Vdc

24 Vdc



Battery Chargers are designed in accordance with international IEC/EN 60146-1-1 standards

www.powerelektronik.com.tr

DEFINITIONS AND SYSTEM INFORMATIONS

WHAT ARE INDUSTRIAL RECTIFIERS - BATTERY CHARGERS?

Rectifier Products are used in utility HV (High Voltage), MV (Medium Voltage) and LV (Low voltage) energy control and automation systems to meet the needs such as relay control, breaker control, communication, automatic control and emergency lighting in case of power cut or recovery. These are products designed to be battery supported.

HOW DOES INDUSTRIAL RECTIFIER WORK?

Industrial Rectifiers takes 1 Phase or 3 Phase AC mains energy, reduce it to the desired level with the help of Stepdown transformer, and at the same time provide the necessary energy to the thyristor circuits in the rectifier circuit by providing galvanic isolation. The DC energy coming out of the rectification unit is filtered and converted into smoother and cleaner DC energy.

With the help of the rectifier software, this DC energy charges the batteries according to float-boost-equalizing charging modes and provides the necessary continuous energy to DC loads. In case of grid power failure, it provides all of its DC energy needs from the batteries. Batteries continue to supply DC loads for a pre-calculated period of time (such as 4,6,8,12 hours) in accordance with the programmed discharge level. When the grid is restored, the discharged batteries begin to recharge.

WHERE ARE INDUSTRIAL RECTIFIERS - BATTERY CHARGERS USED?

- » In power plants (Hydro, Thermal, Wind, Geothermal, Biomass, Natural Gas, etc.)
- » HV High voltage transmission and downcomer centers
- » MV Medium voltage transformers and distribution centers
- » Metro stations energy control centers
- » In control and command centers of all kinds of pipeline stations
- » DCS, Scada automation systems

WHY ARE THERE 24, 30, 48, 110, 125, 220 VDC TYPES?

The coil control voltage of electrical equipment such as relays and breakers that industrial rectifiers will control is designed at different voltages by different manufacturers.

Generally, low voltage 24VDC rectifier is used for low power consuming DC loads.

Since it is designed as 48Vdc, 110Vdc and 220Vdc to make compact designs at lower currents for DC control equipment that draws higher power-current, the rectifier design is also installed in accordance with this DC voltage.

HOW TO SIZING RECTIFIER BATTERIES?

In industrial rectifiers, battery types can sometimes be lead acid or Nickel-Cadmium type depending on need, sometimes preference, and sometimes specifications.

While OPZV tubular plate batteries are preferred in instant high current needs, OPZS and VRLA types are preferred in systems that require a long discharge time. Ni-Cd batteries can be preferred where high performance for many years and less temperature effects are desired. When calculating battery capacities, the required DC energy is determined by extracting the load profile (current and duration information) and using the IEEE battery calculation method.

IN WHICH CASES ARE RECTIFIERS USED AS REDUNDANT BACKUP?

Especially in facilities where power outages may lead to critical consequences, in case one of the one of rectifier fails, it is preferred to use the other rectifier-battery set in parallel with backup to continue to supply DC energy needs without interruption.


1-PH INDUSTRIAL BATTERY CHARGER PROPERTIES


PWR11 MODEL 30VDC 35A



- ▶ 16-Bit DSP control
- ▶ Graphic LCD screen
- ▶ 5 control button
- ▶ Lower than 5% ripple
- ▶ Dry relay contacts for SCADA monitoring
- ▶ Over temperature protection
- ▶ Overload protection
- ▶ Programmable auto Boost Charge function
- ▶ Programmable Float Charge function
- ▶ Transformer and Thyristor based digital controlled rectifier technology
- ▶ Voltage and current full controls
- ▶ Front access
- ▶ Input voltage tolerance $\pm 15\%$ 1-ph 200/230/240 VAC
- ▶ Input Frequency 50 Hz/60 Hz $\pm 5\%$
- ▶ Output voltage 30VDC nominal
- ▶ DC+ and DC - leakage protection
- ▶ Output short circuit protection
- ▶ Status and alarm LEDs
- ▶ Optional high IP protections


Supported Battery & Racks

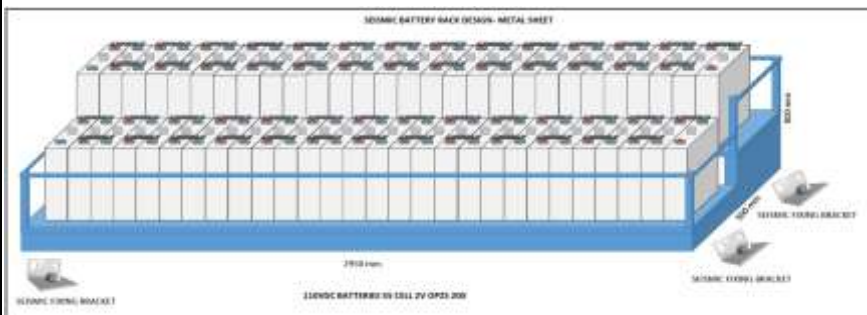



Optional

Condensing Protection by Heater




Programmable $2 \times 8 = 16$ Scada Dry Relay Contacts



Optional

Additional AC-DC Volt-Amp Meter



Industrial Control and Design
Thanks to Transformer and Thyristors




16 Pcs Alarm and Status LED Indicator



Optional

AC & DC Surge Arresters protections

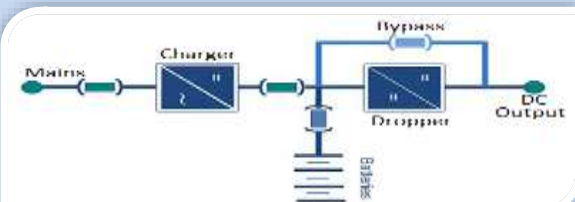

Optional

2-Stage Dropper diode function




» VRLA
» GEL
» OPZV
» OPZS
» NI-CD

Able to charge kind of battery types
and battery test scheduling function


1-PH INDUSTRIAL BATTERY CHARGER SYSTEM DESIGNS

PWR11 MODEL 30VDC 35A

General Single Connection Line Diagram

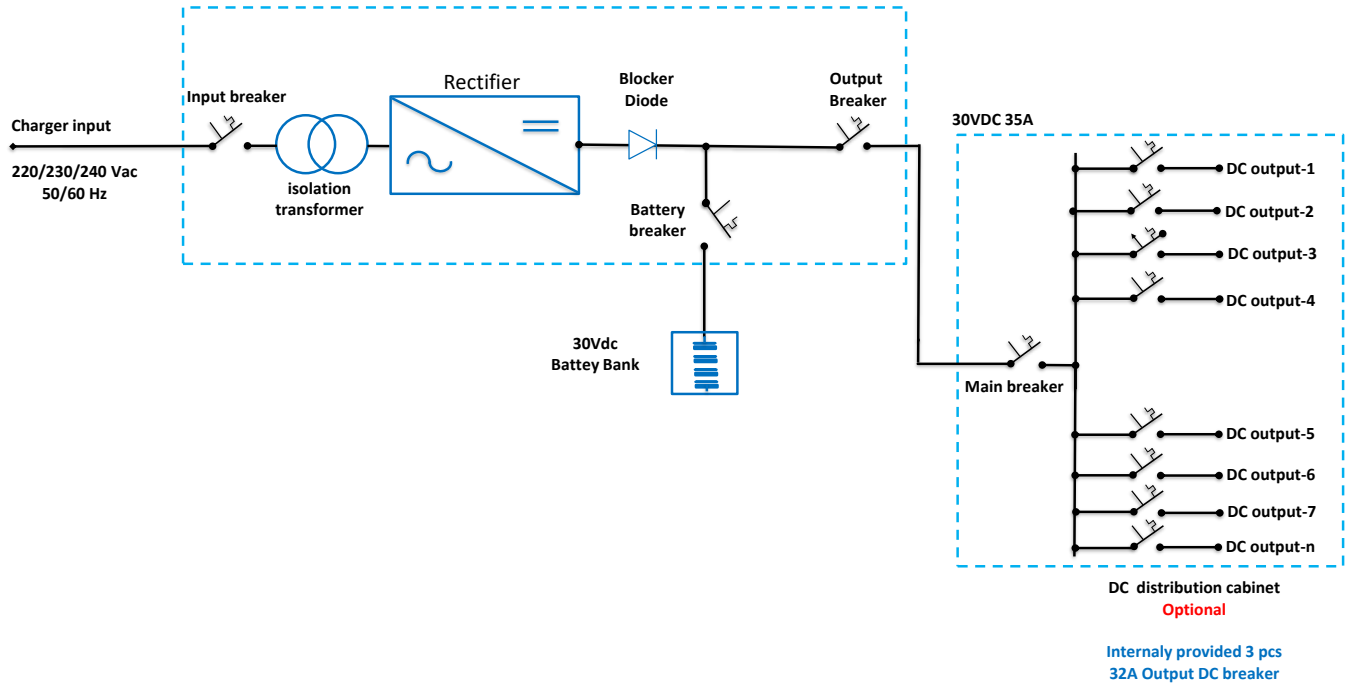

General Redundant Connection Line Diagram

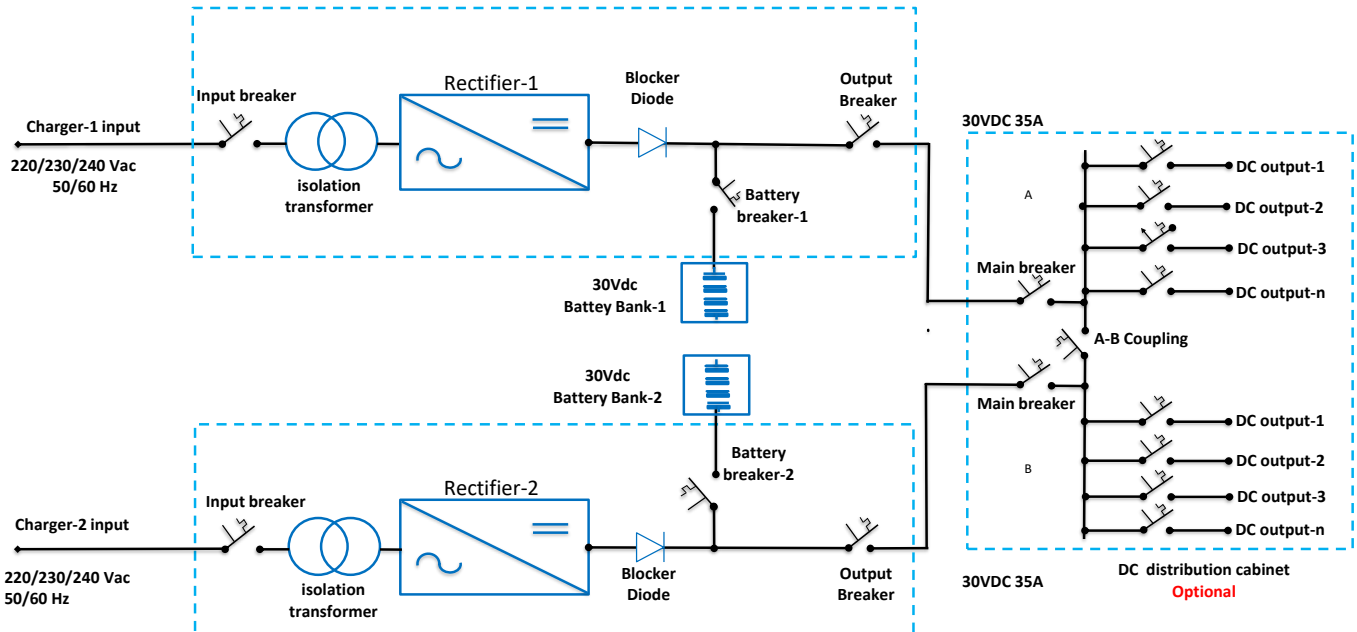

BATTERY INFORMATIONS

Voltage 6V

Model: L6V110

Brand Marathon

Quantity 5

Marathon L-XL / L6V110

INDUSTRIAL BATTERIES / NETWORK POWER

Designed for durability in telecommunications and electric utility applications, the Marathon L/XL series provides high performance and reliability in medium and long duration discharge applications.

Part Number: NALL060110HM0MC

APPLICATIONS



SPECIFICATIONS

- Maintenance-free (no topping up) during the whole service life
- High-Compression Absorbent Glass Mat (AGM) technology
- Design life: » > 12 years– Very Long Life« according to EUROBAT 2015 Classification
- Available as standard or flame retardant version (UL 94-V0)
- Grid plates with superior lead calcium alloy for excellent corrosion resistance
- Very low gassing due to internal gas recombination (99 % efficiency)
- Low self discharge rate, enabling extended storage capability
- Designed in accordance with IEC 60896-21/-22
- Approval: UL (Underwriter Laboratories)
- Trouble-free transportation of operational blocks and cells, no restriction for most rail, road, sea and air transportation (IATA, DGR clause A67)
- Manufactured in Europe in our ISO 9001 certified production plants



Design life
> 12 years
– Very Long
Life



Block battery/
single cell



Grid plate



Recyclable



Valve regulated
lead-acid
batteries



Maintenance
free (no
topping up)





Special high
current
performance

TECHNICAL CHARACTERISTICS AND DATA

Nominal voltage	6 V
Float charge	2,27 V/C @ 20 °C
Capacity	CP 10min 1,6V/C 20°C 1583W/Bloc CC 10h 1,8V/C 20°C 112Ah
Short circuit current	3010 A (IEC60896-21/22)
Internal resistance	2,1 mΩ (IEC60896-21/22)

Terminal	M - M8
Terminal Torque	8 Nm
Container	UL 94-HB (Polypropylene)
Temperature range	-40°C to 55°C
Dimensions (l x b/w x h)	272 x 166 x 190 mm
Weight	21,3 kg
Origin	Castanheira, Portugal

BATTERY CHARGER CABINET CUBICAL DRAWING

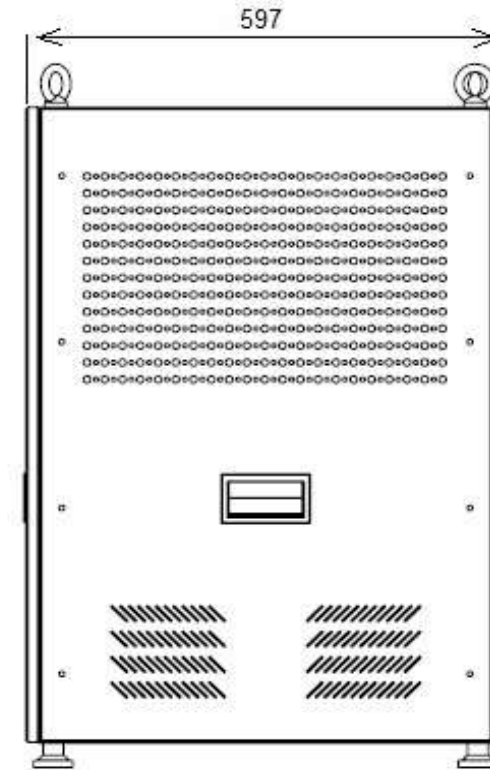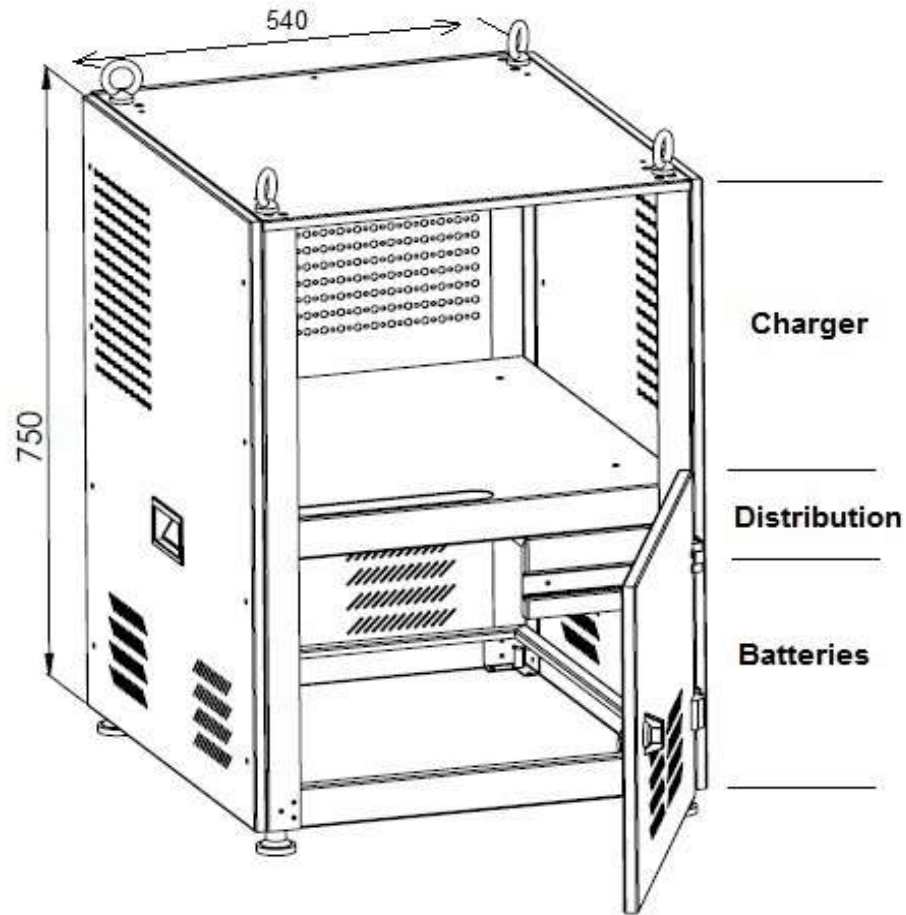


POWER
ELEKTRONIK



POWER ENGINEERING **POWER** SOLAR

Cabinet Type	RT-9120-3
Charger Vdc/A	30VDC 35A CHARGER
Internal Battery	5 PCS 6V 110Ah

RECTIFIER ELECTRICAL SINGLE LINE DIAGRAM

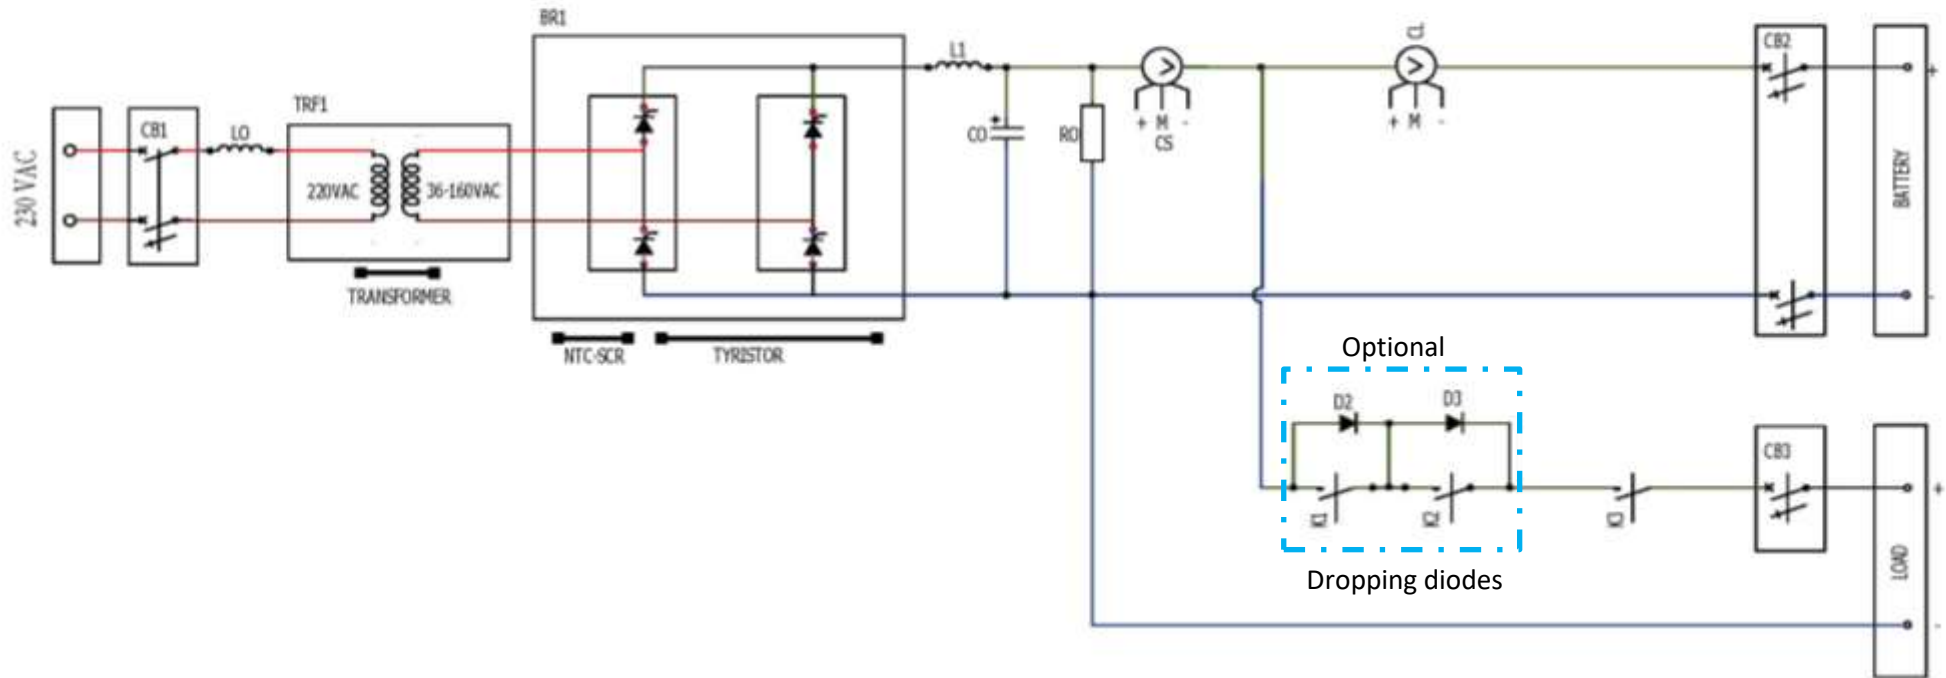

BATTERY CHARGER PROGRAMMABLE SCADA DRY RELAY OUTPUTS

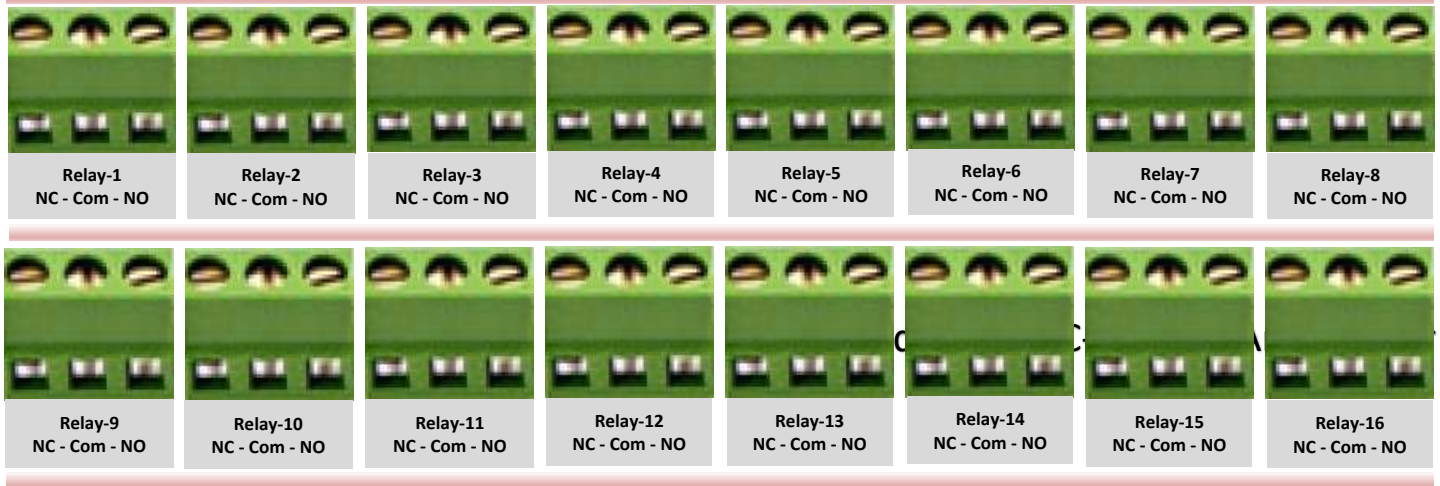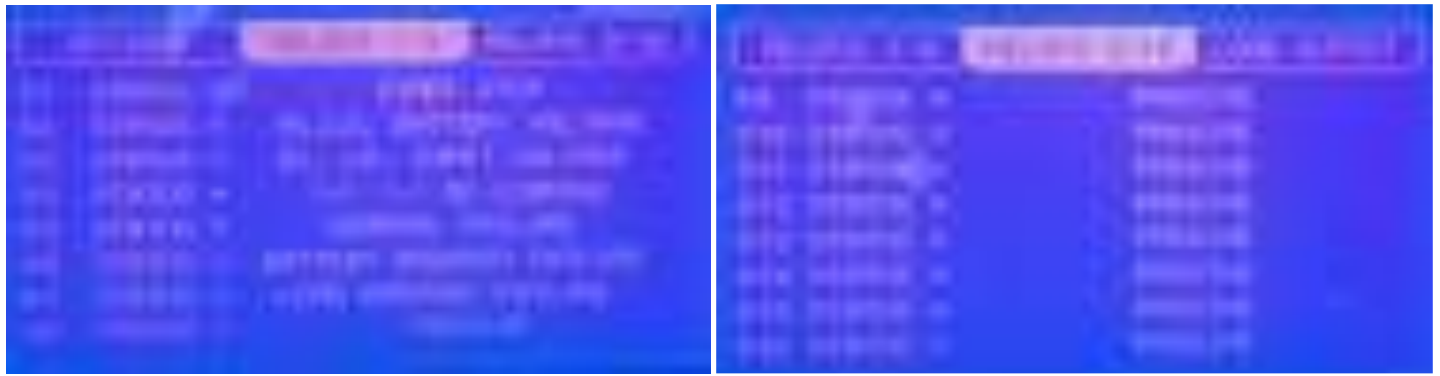

Available Dry Relay Definitions

1. START STOP:

Indicates the operating status of the Rectifier. When the start button on the front panel is pressed, the dry contact warns you.

2. OVERHEAT:

Whenever the heat reaches to the limit that defined in the menü, this dry contact gives warning.

3. INPUT CIRCUIT BREAKER IS OFF:

Whenever the input circuit breaker is off; this dry contact gives warning.

4. BATTERY CIRCUIT BREAKER IS OFF:

Whenever the batter circuit breaker is offi this dry contact gives warning.

5. LOAD CIRCUIT BREAKER IS OFF:

Whenever the load circuit breaker is off, this dry contact gives warning.

6. HIGH BATTERY VOLTAGE:

Whenever the voltage reaches to the "Vo High Limit" value, defined in the menu, this dry contact gives warning .

7. LOW BATTERY VOLTAGE:

Whenever the voltage reaches to the "Vo Low Limit" value, defined in the menu, this dry contact gives warning.

8. BATTERY VOLTAGE HIGH + LOW:

Controls both situations above in a single dry contact.

9. FAN ERROR:

Whenever the limits on the "Fan Error" menu is reached, the dry contact gives warning.

10. BATTERY LINE DISCONNECTED:

Whenver the device is "ON" and there is a disconnection on the battery cables, the dry contact gives warning.

11. REVERSE BATTERY LINE:

Indicates that the Battery connection is wrong. This warning is advised to be kept on the dry contact choices. Must be checked! Before the device is turned on.

12. BATTERY GENERAL ERROR:

Dry contact warns you whenever there is an Error about the Battery.

13. (+) DC LEAK:

(+) DC Leakage warning.

14. (-) DC LEAK:

(-) DC Leakage warning.

15. (+) /(-) DC LEAK:

(+) or (-) DC Leakage warning together.

16. MAINS ON/OFF:

Provides a dry contact information about the presence of the mains voltage.

17. MAINS HIGH:

If the mains voltage is higher than the value Vi HIGH LIMIT set on the MENU, dry contact gives warning.

18. MAINS LOW:

If the mains voltage is higher than the value Vi LOW LIMIT set on the MENU, dry contact gives warning.

19. MAINS HIGH + LOW:

In the case of the mains voltage out of the set values, dry contact gives warning.

20. BOOST CHARGE:

Indicates that the Rectifier is in the fast charging mode.

21. FLOAT CHARGE:

Indicates that the Rectifier is in the normal charging mode.

22. GENERAL ERROR:

If this option is chosen, whenever one of the errors above is ocured, dry contact gives warning .

PWR11 INDUSTRIAL BATTERY CHARGER



30VDC 35A BATTERY CHARGER TECHNICAL TABLE

Rectifier Input:

Voltage	230	VAC	-%15	+%15
Current	9	A		
Frequency	50	Hz		
Input Fuse	16	A	Special value	No
Configuration	☒ Single Charger	☐ Redundant Charger	☐ Not Specified	
Input Isolation transformer	Yes			

Load Output:

Voltage	30	Vdc	Max. Load Voltage	33,00	by dropper
Current	35	Amp			
Dropper	Yes				
Ripple	< 5 % Without Battery	< 1 % With Battery			
Voltage Regulation:	± %1	rms	* battery mode		
Output Breakers	40A MCB				
Additional Distribution Breaker	Not provided				

Battery and Charging:

Battery Block Voltage	6V x 5 pcs L6V110 model	Battery Brand	Exide/Marathon
Battery Type	Lead Acid	Battery Cells Nr	Lead Acid:5
Charging Current	1 to 20	Amper	Battery Breaker ampere
Float Charge Voltage	33,00	V/Cell	Battery placement
Boost Charge Voltage	36,00	V/Cell	Battery capacity
Battery test voltage	30,00	V/Cell	Battery sizes L X H X W
Load Current Limit	35	A	Battery unit weight
Charge Characteristic	DIN 41773	Battery Configuration	1 string *1 charger

Cabinet:

Cabinet type	Stand Floor	Control and LCD	Graphic LCD
Cooling	Fan cooling with thermostat controlled	Door stop	Right
Cable Entry	Bottom Entry	LCD language	English
Label	Grey - Pasted	Color	RAL 7035
Cabinet Lighting	Yes	Locking	Lockable
Cabinet dimensions	WxDxH: 540 x 597 x 750 mm	Weight	190 kg

General Values:

Operating Temperature Range	-10 /+50 °C	IEC Standard	IEC 60146-1-1
Condensing resistance Heater	Yes	Noisy	<65 dB
Storage temp. Range	-25 /+55 °C	Humidity	<90%
Communication	RS232,dry relay, RS 485 RTU	Isolation Voltage	2kV 1 min
Altitude	Max. 1000m NN	Protection degree	IP21

Protections:

DC Low-High protection	☒	Overload	☒	Over Temp	☒
Phase Failure	☒	DC± to GND Leakage	☒	Reverse Battery	☒
Input Mains Surge protection	☒	DC Surge protection	☐	Emergency Stop	☒

Lamp Indicators:

16 Pcs	Mains ON	Mains OFF	Start	Stop	Mains High	Mains Low	DC High	DC Low	+DC Leakage	-DC Leakage	Current Limit	Fan Fault	Over Temp.	Battery Fault	Temp. Comp.	General Fault

Notes & Options :

- » Dry Relay contacts included
- » Dropper diodes function excluded
- » RS 485 RTU Communication excluded
- » Blocker diodes included
- » Input AC Breakers included
- » Output DC Breakers included
- » Battery DC Breaker included